
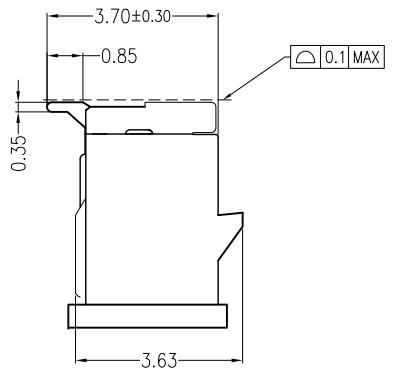




REV	DESCRIPTION	DESIGN	DATE
A0	NEW RELEASE	Wudanping	2017/05/24
A1	Increase the gold-plating specification	Zhouxiulong	2017/10/06
A2	The correct current	Jiangjiayin	2019/03/29

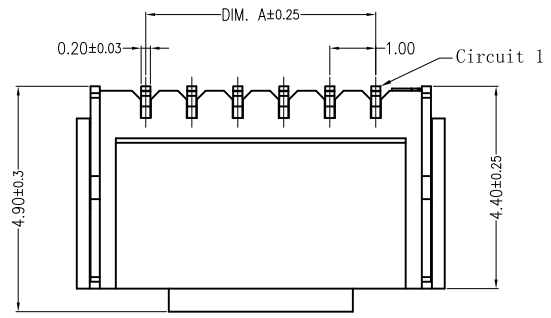

Specifications:

- Contact resistance: ≤20mΩ
- Insulation resistance: ≥100MΩ
- Rated voltage: 50V AC DC
- Rated current: 1.0A AC DC A2
- Withstand voltage: 500V AC/minute
- Temperature range: -25°C ~ +105°C
- Housing: LCP UL94V-0, Natural
- CAP: LCP UL94V-0, Natural
- Contacts: Phosphor bronze (Matte sn/Gold plating)
- Solder tabs: Phosphor bronze/Matte sn

缺口为浇口工艺，减少自动机加盖卡料，
缺口位置不固定，也可在另一侧

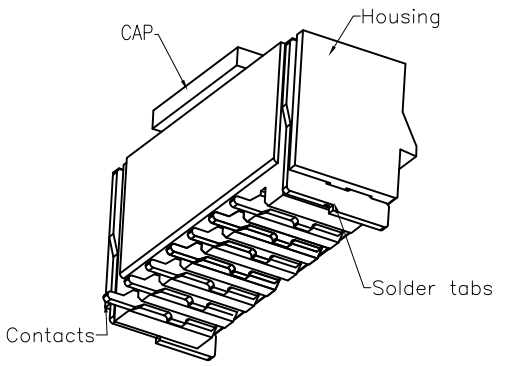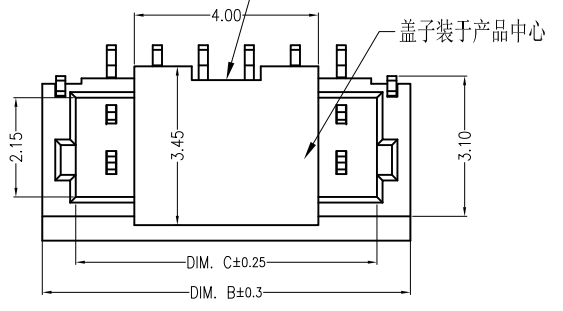


ORDER INFORMATION:

A1002AWV-**-F2M*-R-X

PART No. _____
 No. OF CIRCUITS: _____
 PLASTIC MATERIAL: _____
 F2M=LCP(NATURAL)

SPECIAL CODE:
 X=CAP
 PACKAGING:
 R=REEL
 P=PE
 PLATING:
 B=MATTE SN
A2 C=GOLD

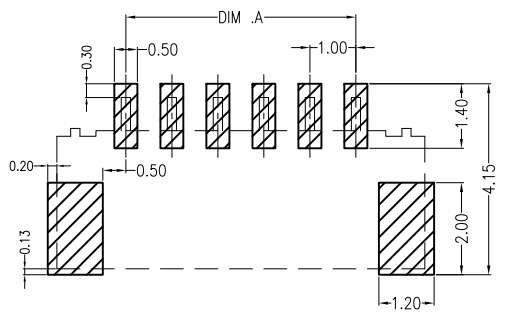

Recommend PCB Layout

Circuit	Dimensions (mm)		
	DIM. A	DIM. B	DIM. C
02	1.00	4.00	2.45
03	2.00	5.00	3.45
04	3.00	6.00	4.45
05	4.00	7.00	5.45
06	5.00	8.00	6.45
07	6.00	9.00	7.45
08	7.00	10.00	8.45
09	8.00	11.00	9.45
10	9.00	12.00	10.45
*11	10.00	13.00	11.45
*12	11.00	14.00	12.45
*13	12.00	15.00	13.45
*14	13.00	16.00	14.45
*15	14.00	17.00	15.45
*16	15.00	18.00	16.45
*20	19.00	22.00	20.45

JKUN 温州健坤接插件有限公司
 WENZHOU JKUN CONNECTOR CO.,LTD.

TITLE:
 1.0mmPITCH 180°WAFER SMT TYPE

GENERAL TOLERANCE	
X. ±0.50	X. ±5'
X.X ±0.30	X.X ±2'
X.XX ±0.20	X.XX ±1'

USE: CUSTOMER
APPD: Shaojinghe
CHKD: Zlinglingqing
DR: Jiangjiayin

PART NO.:	A1002AWV-**-F2M*-R-X
DWG NO.:	JKUN/GCKH-0504
SCALE	1 : 1
SHEET	1 / 1



UNITS:
 mm