

A

B

C



D

E


F

REV	DESCRIPTION	DESIGN	DATE
A0	Release	吴丹平	2013.03.05

1

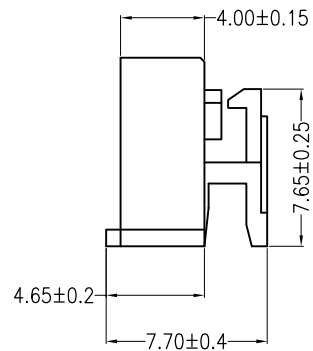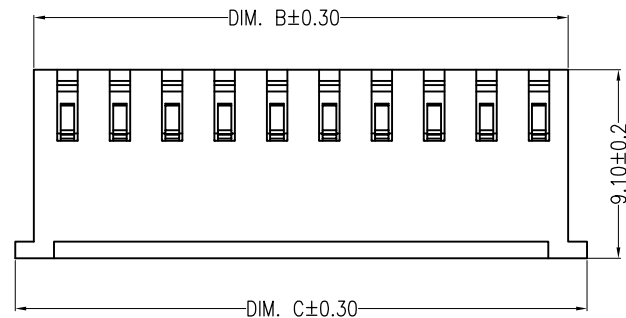

2

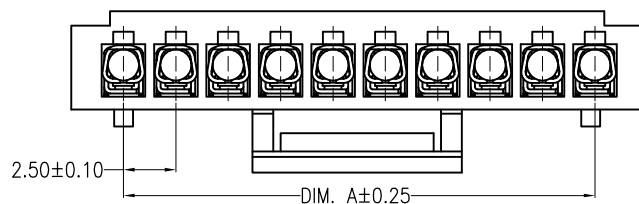

3

主要技术参数 Main Specifications

线 数 (Poles): 02 to 16

接触电阻 (Contact resistance): $\leq 20m\Omega$

绝缘电阻 (Insulation resistance): $\geq 1000M\Omega$

额定电压 (Rated voltage): 250V AC DC

额定电流 (Rated current): 3.0A AC DC

耐 电 压 (Withstand Voltage): 1000V AC/minute

温度范围 (Temperature Range): $-25^{\circ}C \sim +85^{\circ}C$

4

ORDER INFORMATION:


A2502Y-**-A5W-P	
PART No. _____	PACKAGING: _____
No. OF CIRCUITS: _____	P=PE
02~16	PLASTIC MATERIAL: _____
	A5W=PA66 (WHITE)

1

2

3

4

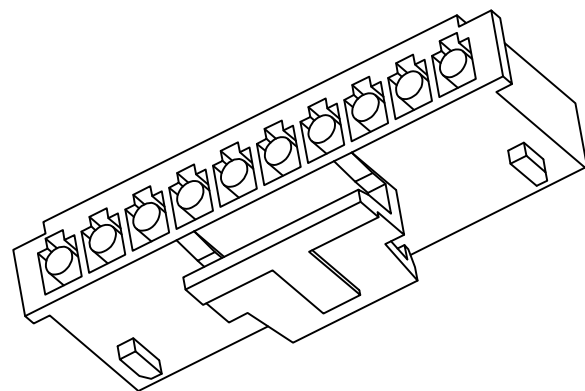

5

Circuits	Dimensions (mm)		
	DIM. A	DIM. B	DIM. C
02	2.50	5.75	7.25
03	5.00	8.25	9.75
04	7.50	10.75	12.25
05	10.00	13.25	14.75
06	12.50	15.75	17.25
07	15.00	18.25	19.75
08	17.50	20.75	22.25
09	20.00	23.25	24.75
10	22.50	25.75	27.25
11	25.00	28.25	29.75
12	27.50	30.75	32.25

ITEM	COMPONENT	Q'TY	MATERIAL	FINISH
C				
B				
A	PEDESTAL	1 PCS	PA66	UL 94-V0 COLOR: WHITE

JKUN 温州健坤接插件有限公司 WENZHOU JKUN CONNECTOR CO., LTD.			TITLE: - 2.5mm PITCH Housing	
X.±0.5	X.±5'	USE: CUSTOMER	PART NO.: A2502Y-**-A5W-P	
.X±0.3	.X±2'	APPD: 邵敬和	DWG NO.: JKUN/GCCP-0549	
.XX±0.25	.XX±1'	CHKD: 田峰	SCALE: 1 : 1	
--	--	DR: 吴丹平	SHEET: 1 / 1	
UNITS: mm				

A

B

C

D

E

F