


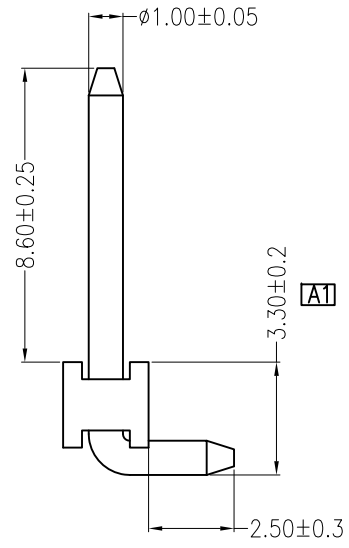
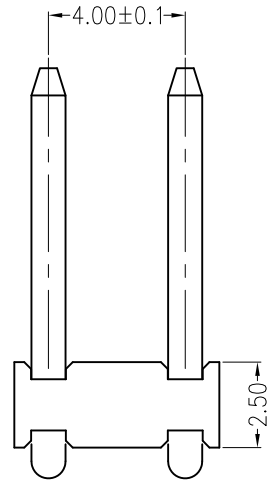


REV	DESCRIPTION	DESIGN	DATE
A0	NEW RELEASE	李润	2016/03/28
A1	按当前机台可管控精度更改公差	Jiangjanyin	2019/08/17

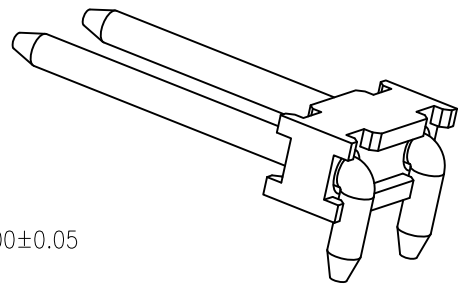


SUGGESTED PCB LAYOUT  
(COMPONENT SIDE)

**Specifications:**

- Poles: 02
- Contact resistance: ≤20mΩ
- Insulation resistance: ≥1000MΩ
- Rated voltage: 250V AC DC
- Rated current: 2.0A AC DC
- Withstand Voltage: 2000V AC/minute
- Temperature Range: -40°C ~ +110°C
- Housing: PA46 UL94V-0, Natural (Beige)
- Contacts: Brass/Ni-plated

**ORDER INFORMATION:**

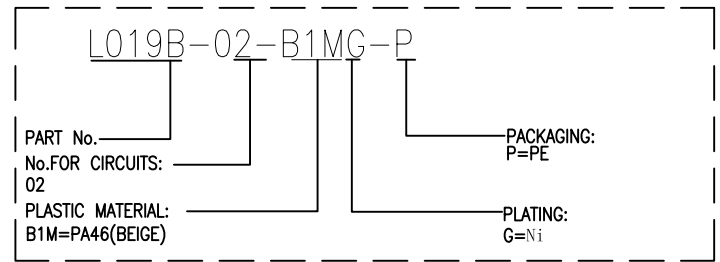

<b>JKUN</b> 温州健坤接插件有限公司 WENZHOU JKUN CONNECTOR CO.,LTD.		TITLE: -	
GENERAL TOLERANCE		USE: CUSTOMER	PART NO.:
X. ±0.50	X. ±5°	APPD: Liuzhenling	L019B-02-B1MG-P
X.X ±0.30	X.X ±2°	CHKD: Wangliang	DWG NO.:
X.XX ±0.20	X.XX ±1°	DR: Jiangjanyin	JKUN-GCKH-0255
	UNITS: mm	SCALE 1 : 1	SHEET 1 / 1